Mini Jumbo 8 AIRCRAFT










SPECIFICATION

Mini Jumbo 8 AIRCRAFT

- Head: Type Mini Jumbo 8 Aircraft 4,800 watts max
- · Light Shield: Aluminum sheet
- Frame: Rectangular aluminum section
- Rating: 120 volts. A.C. or D.C. 40 Amps Max
- Switches: On and Off switch mounted on rear
- Cable: Attached with male and female interlocking "Veam" type connectors
- Construction: Rugged construction of solid sheet of aluminum and metal fusion of aluminum
- Yoke: Aluminum fusion with steel yoke pin. With the same yoke is possible change the position of the M.Jumbo from horizontal to vertical
- Beam Control: Pivoted globe modules permit variable beam coverage
- **Size:** 53,5" X 29,1" X 7,9".
- Head Weight: 62 Lbs. (including globes).
- Finish: Black powder coat enamel
- Globe: GE Q4559X Aircraft Landing 28 Volts 600 Watts
- Safety: Protection solid net in front of each modules
- Note: Use only on dimmer

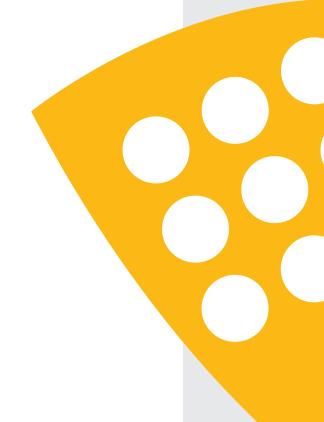



PERFORMANCE DATA

Using (Using 600 watt, 28 volt, quartz globes.																					
Color Temp. °K	Globe Code No. and Beam Pattern	20 Feet			30 Feet			40 Feet			50 Feet			75 Feet			100 Feet			150 Feet		
		Light	Lighted Area*		Light Ligh		d Area*	Light	Lighte	ighted Area*		Lighted Area*		9	Lighted Area*			Lighted Area*		Light	Lighted Area*	
		F.C.	Width	Height	F.C.	Width	Height	F.C.	Width	Height	F.C.	Width	Height	F.C.	F.C. Width	Height	F.C.	Width	Height	F.C.	Width	Height
3200	Q4559X Aircraft Landing Globes	7,400	3.1	3.1	3,550	6.2	6.1	1,900	6.2	6.1	1,400	7.8	7.7	650	11.6	11.5	400	15.5	15.5	160	23.4	23.0

^{*}Light tapers smoothly at edge of field. Dimensions listed define flat area boundaries at which the intensities are approximately 50% of tabulated intensities at beam center. Values listed are with globe modules pointing straight forward and individual globes positioned for maximum width and minimum height of their respective beams.