


Maverick™


Cineo Maverick™ is the long-awaited portable member the TruColor family from Cineo Lighting. This evolutionary fixture provides all of the benefits of Remote Phosphor Technology found in the TruColor HS™ and LS™, while better meeting the demands of field use: lightweight, DC powered and weatherproof. Cineo Maverick delivers a volume of light equal to a traditional 1K soft source, optimized for image capture as well as other applications that demand accurate color rendering.

Features








- Utilizes Remote Phosphor Technology (RPT) for accurate, consistent output
- Optimized output for film, video and still photography
- Weather resistant
- Uses TruColor LS™ panels and accessories
- Available 2700K, 3200K, 4300K, 5600K, 6500K
Chroma Green, Chroma Blue
- Output: 6000 lumens
- 160° light spread
- Small and lightweight
- Flicker-free
- Completely silent operation
- Rotary on-board dimming or DMX control: 0-100%
- 80/20 T-Slot mounting slots for maximum flexibility
- Removable yoke
- Accessories include AC adapter, V-Lock battery adapter, Anton Bauer battery adapter, DMX controller
- Accessories can be mounted on yoke, or on-fixture with optional rear mounting plate

Specifications

Input: 12-32 VDC input, 120 watts
Output: 5,000 lumens
Size: 9.4" x 7.3" x 3" (240mm x 186mm x 78mm)
Weight: 2.2 kg (4.9 lbs.)
Completely flicker-free operation
4-pin XLR power input
EtherCon DMX port
35,000 hr. L70 rated
Environmental temperature range: -20° - +50° C
Max. temperature rise: +45° C
2-year parts and labor warranty
ETL and cETL pending, CE Compliant
Zero UV light emitted
Made in USA

CRI Measurement	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	CRI	CRI Extended	TLCI Results	
Maverick @ 2700K	97	99	96	96	98	98	99	98	97	100	94	92	97	96	98	97	2700K	99
Maverick @ 3200K	98	99	94	97	100	97	98	97	95	96	96	84	99	96	98	96	3200K	99
Maverick @ 4300K	98	99	97	97	97	95	98	97	93	98	97	77	98	98	97	96	4300K	98
Maverick @ 5600K	94	95	93	93	93	90	98	95	85	86	92	68	95	96	94	91	5600K	97
Maverick @ 6500K	95	98	97	93	93	94	97	95	90	93	93	72	96	99	95	93	6500K	97

CRI is R1-R8, Extended is R1-R14

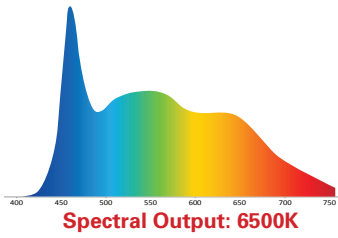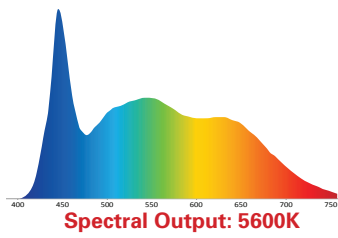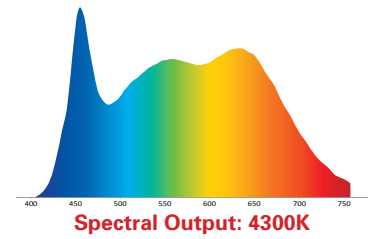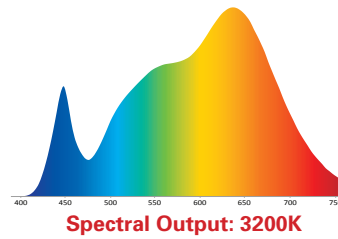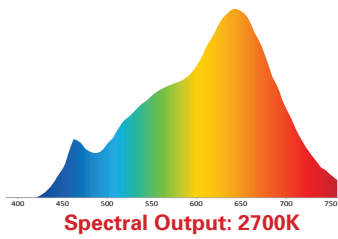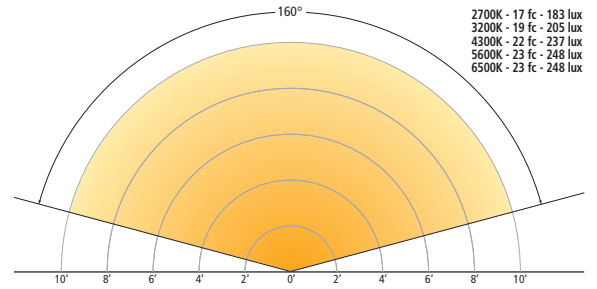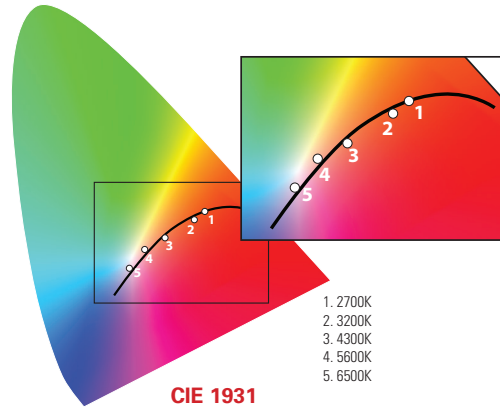

Specifications are subject to change without notice. Cineo Lighting, TruColor, TruColor HS, TruColor LS and Maverick are registered trademarks of Cineo Lighting, Inc.
©2014 Cineo Lighting, Inc. v03.24.14

CINEO
LIGHTING™

Silicon Valley | Los Angeles | London
info@cineolighting.com
+1 310.425.3425

www.cineolighting.com