

Meteora 8[®] AIRCRAFT



the sun never sets




IRIDE[®]
LIGHTING
www.iridelighting.eu



Meteora 8 AIRCRAFT

- **Head:** Meteora 8 aircraft 2000 watts max
- **Rating:** 120 volts. A.C. or D.C. 16.6 Amps Max
- **Switches:** ON and OFF switches mounted on rear
- **Cable:** Attached with male and female interlocking "Veam" Type Connectors
- **Construction:** Rugged construction of solid sheet of aluminum and metal fusion of aluminum
- **Yoke:** Mix of rail and fusion of alluminum with steel yoke pin
- **Size:** 27,2" X 23,6" X 11"
- **Head Weight:** 31 Lbs. (including globes)
- **Finish:** Black powder Coat enamel
- **Globe:** Par 36 4596, 28 Volts 250 Watts
- **Safety:** protection solid net in front of globes
- **Note:** Use only on dimmer

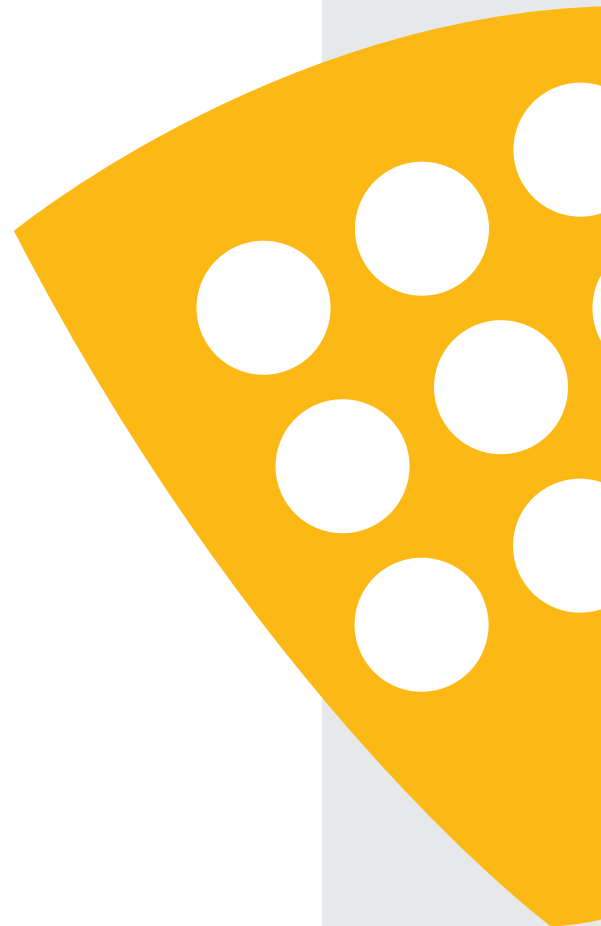

PERFORMANCE DATA

Using 250 watt, 28 volt, quartz globes.

Color Temp. °K	Globe Code No. and Beam Pattern	20 Feet			30 Feet			40 Feet			50 Feet			75 Feet			100 Feet			150 Feet		
		Light F.C.	Lighted Area* Width	Lighted Area* Height	Light F.C.	Lighted Area* Width	Lighted Area* Height	Light F.C.	Lighted Area* Width	Lighted Area* Height	Light F.C.	Lighted Area* Width	Lighted Area* Height	Light F.C.	Lighted Area* Width	Lighted Area* Height	Light F.C.	Lighted Area* Width	Lighted Area* Height	Light F.C.	Lighted Area* Width	Lighted Area* Height
3200	PAR 36 4596	1,100	5.13	5.13	530	7.2	7.2	290	8.4	8.4	200	9.0	9.0	70	ND	ND	50	ND	ND	17	ND	ND

*Light tapers smoothly at edge of field. Dimensions listed define flat area boundaries at which the intensities are approximately 50% of tabulated intensities at beam center. Values listed are with globe modules pointing straight forward and individual globes positioned for maximum width and minimum height of their respective beams.