

F-7HS 1,500nits


7" FHD Field Monitor with Enhanced Sharpness



Main Body Dimensions

Main Body 211 x 125 x 28.3 (mm) / 8.3 x 4.92 x 1.11 (inch)

Weight 0.76kg / 1.67lbs

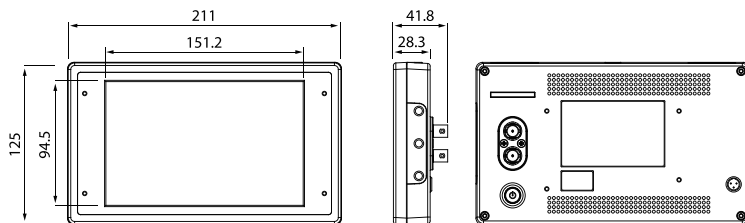

Optional Accessories



Product Highlights

- 7" Full HD Resolution (1920 x 1080)
- Luminance up to 1,500nits
- HDMI ↔ SDI Cross Conversion
- HDR Emulation (PQ, HLG, S-Log3)
- Custom 3D LUT Import by USB Flash Drive
- Various Built-in Camera LUTs
- ARRI Metadata
- Excellent Sharpness
- Peaking Boost
- Waveform / Vectorscope
- H/V Flip
- Marker
- Split Zoom
- Focus Assist
- 16ch Audio Level Meter
- Anamorphic Desqueeze
- Timecode Display
- Luma(Y') Zone Check
- Screen Tally

Size	7"
Resolution	1920 x 1200 (16:10)
Pixel Pitch	0.0787(H) x 0.0787(V) mm
Color Depth	1.073B Colors (10 bit)
Viewing Angle	160°(H) / 160°(V)
Luminance of white	1500nits
Contrast Ratio	1200:1
Display Area	151.2(H) x 94.5(V) mm

Input	
1 x HDMI	HDMI Input
1 x BNC	SDI Input

Output	
1 x HDMI	HDMI Output (HDMI loop out, SDI-to-HDMI Conversion output)
1 x BNC	SDI Output (SDI loop out, HDMI-to-SDI Conversion output)

Input Signal	
3G-SDI	2.970Gb/s
HD-SDI	1.485Gb/s
SD-SDI	270Mb/s
HDMI	1080p(60)/1080i(60)/720p(60)/480p(60)/576p(50)

SDI Input Signal Formats	
SMPTE ST-425M-A/B	1080p(60/59.94/50/30/29.97/25/24/23.98/30sF/29.97sF/25sF/24sF/23.98sF)
	1080i(60/59.94/50)
SMPTE ST-274M	1080i(60/59.94/50)
	1080p(30/29.97/25/24/24sF/23.98/23.98sF)
SMPTE ST-296M	720p(60/59.94/50)
SMPTE ST-125M	480i(59.94)
ITU-R BT.656	576i(50)

Audio In	
Audio In	SDI Embedded Audio (Group, Ch Selectable)
Audio Out	External Output Port (3.5mm Phone Jack)
Power	DC 12V 1.8A
Power Consumption (Approx.)	TBD
Weight	0.8kg / 1.76lbs
Included Accessories	D-Tap Cable, Camera Mount